



SM 59/60

SERVOMOTOR MED STYRINGSAUTOMATIK

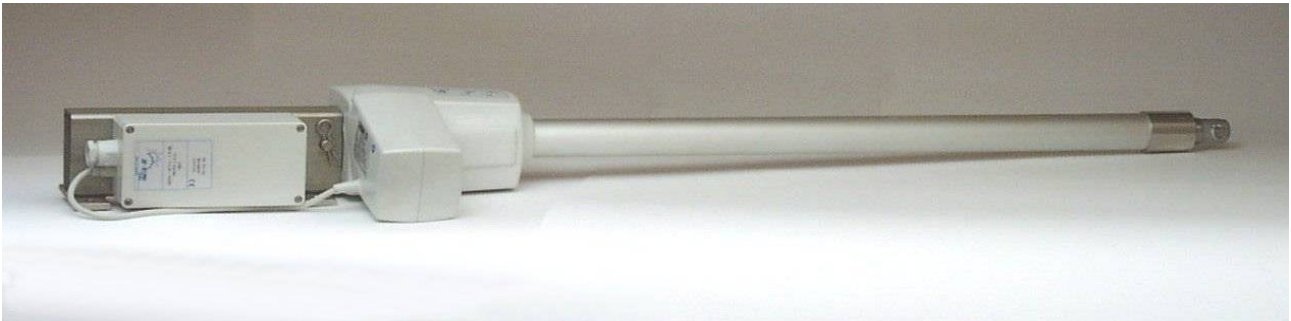

- Position controlled by 0-10V control signal or RS485 communication.
- Easy installation of wire for pulling dampers and inlet valves.
- Emergency opening by the lack of control signal. Control signal could be missing due to faulty cables, power-failure or faulty controller unit.
- Works on 12 VDC so its able to function during power-failure.
- Sealed according to IP65

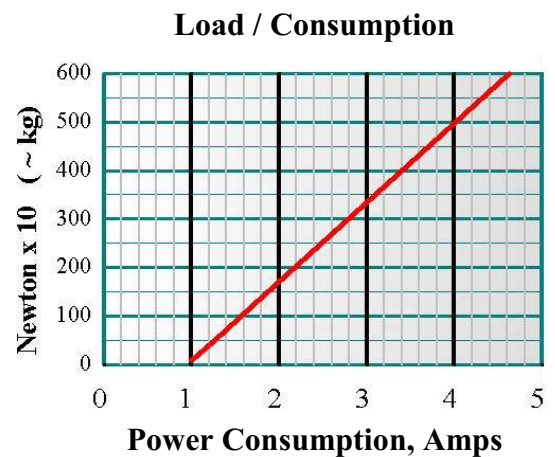

Time consumed by working from 0-100%

Adjustable length of travel	200-600 mm
Control signal	Working range: 1.5-9.5 V Emergency opening < 0.3 V. OK>0.8V
Dimensions	105 x 220 x 1060 mm

No Load	Load 300 Nx10
2½ min	3½ min

*) It is recommended to use full length of travel, which enables it to reset position in both ends.